

Motor parameters

Phase: single phase
Rated voltage: 230 V
Frequency: 50 Hz
Current: 0.2 A
Speed: 2500 rpm
Power: 30 W

Tech nical features




Diameter 152 mm
Surface of rotor Spray finishing
Material of impeller Stainless steel
Mounting plate Stainless steel
Housing material ---
Direction of rotation CCW, seen on rotor
Thermal protector 150° 5A
Type of protection IP44
Insulation class F
Mounting position Any
Operation mode S1
Motor bearing Ball bearing
Max. permissible ambient motor temp. (transp./ storage) 80!
Min. permissible ambient motor temp. (transp./storage) -30!

Optional


Speed output (ERP)

Packing specification

52cm*33.5cm*14.5cm 6pcs

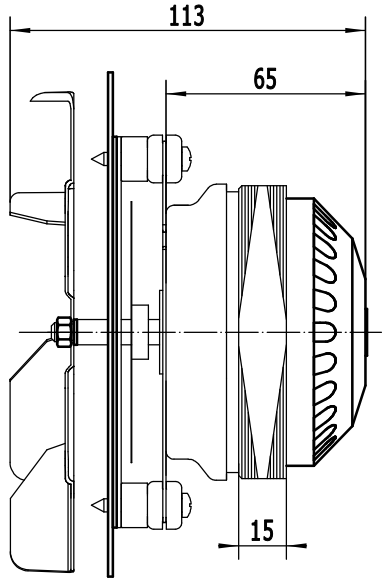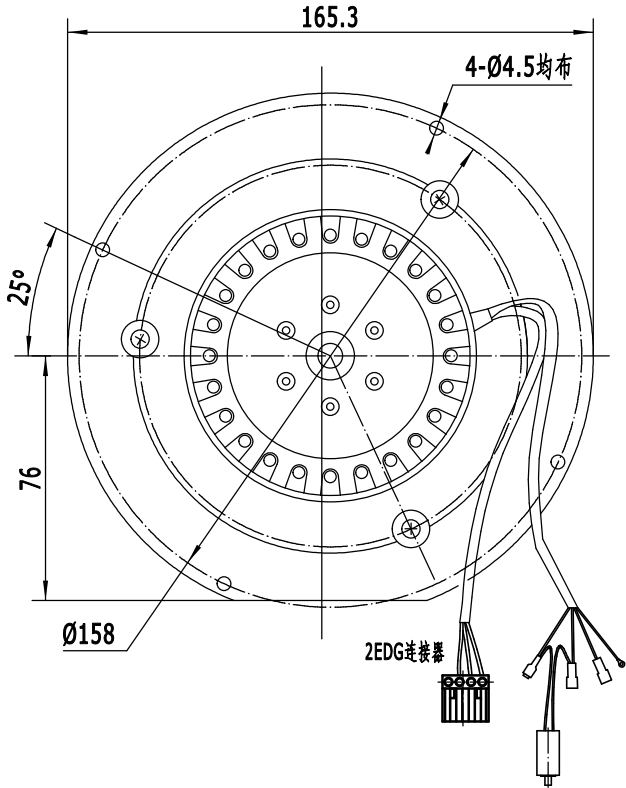

接线图

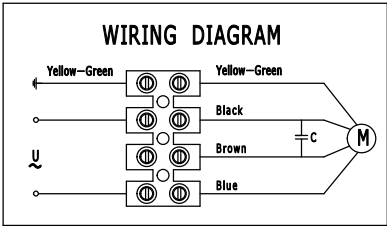

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ANGULAR: MACH BEND TWO PLACE DECIMAL THREE PLACE DECIMAL		NAME	DATE	GP MOTOR TECHNOLOGY CO.,LTD HOT AIR CIRCULATION BLOWERS GL152/020		
			DRAWN					
			CHECKED					
			ENG APPR.					
			MFG APPR.					
		MATERIAL	Q.A.			SIZE DWG. NO. REV. A <small>PUBLISHED BY SOLIDWORKS FLOW SIMULATION</small> SCALE: WEIGHT: SHEET OF		
		---	COMMENTS:					
NEXT ASSY	USED ON	FINISH --	CCW					
APPLICATION		DO NOT SCALE DRAWING						