



- DC External Rotor Motor
- Backward curved plastic / sheet steel / alu. impeller
- Maintenance-free ball bearings
- Class "B" , IP44 / 54
- Thermal Overload Protector
- Operation Temperature: -20° C to 65° C
- Life time: over 30,000 hours
- CCC & CE listed; RoSH & ErP2015 compliant
- EMC: EN61000-6-3 / EN 61000-2-2 / EN 61000-3-2/3 / EN61000-5-1
- Warrent: 12 monthes

MODEL	Voltage Range (VDC)	Voltage 工作电压 (VDC)	Static pressure (pa)	Air flow (M ³ /H/CFM)	Power (Watt)	Speed (RPM)	Current (Amp)	Noise (dB)	N.W (kg)
RB1D133/041A5	16-32	24	382	360/212	33.6	3900	1.4	63	0.7
RB1D133/041A6	34-57	48	382	360/212	33.6	3900	0.7	63	0.7
RB1D133/041H5	16-32	24	492	409/241	55.2	4450	2.30	74	0.7
RB1D133/041H6	34-57	48	492	409/241	55.2	4450	1.15	74	0.7
RB1D155/035A5	16-32	24	280	340/200	30	3000	1.25	63	0.90
RB1D155/035A6	34-57	48	280	340/200	30	3000	0.625	63	0.90
RB1D175/042A5	16-32	24	425	565/332	36	3100	1.6	65	0.75
RB1D175/042A6	34-57	48	425	565/332	33.6	3100	0.7	65	0.75
RB1D175/042H5	16-32	24	645	695/409	72	3900	3.0	74	0.95
RB1D175/042H6	34-57	48	645	695/409	72	3900	1.5	74	0.95
RB1D175/042HH5	16-32	24	744	810/476	108	4480	4.5	76	1.0
RB1D175/042HH6	34-57	48	744	810/476	108	4480	2.25	76	1.0
RB1D190/045A5	16-32	24	473	620/365	60	2950	2.5	67	0.80
RB1D190/045A6	34-57	48	473	620/365	60	2950	1.25	67	0.80
RB1D190/045B5	16-32	24	627	560/330	86	3250	3.6	68	1.35
RB1D190/045B6	34-57	48	627	545/321	86	3250	1.8	68	1.35
RB1D190/045H5	16-32	24	882	800/471	151	4050	6.3	74	1.35
RB1D190/045H6	34-57	48	882	800/471	151	4050	3.15	74	1.35
RB1D220/045A5	16-32	24	350	760/447	45	2300	1.88	65	1.40
RB1D220/045A6	34-57	48	350	760/447	45	2300	0.94	65	1.40
RB1D220/045B5	16-32	24	699	1055/621	110	3100	4.6	76	1.40
RB1D220/045B6	34-57	48	699	1015/597	110	3100	2.3	76	1.40
RB1D225/063B5	16-32	24	635	1130/665	110	2700	4.6	72	1.40
RB1D225/063B6	34-57	48	635	1130/665	110	2700	2.3	67	1.40
RB1D250/045B5	16-32	24	550	1000/588	124.8	2650	5.2	73	1.60
RB1D250/045B6	34-57	48	550	1000/588	124.8	2650	2.6	73	1.60
RB1D250/056B5	16-32	24	595	1650/971	168	2750	6.8	72	2.30
RB1D250/056B6	34-57	48	595	1650/971	168	2750	3.4	72	2.30
RB1D250/056C5	16-32	24	780	1900/1118	228	3000	9.5	76	3.00
RB1D250/056C6	34-57	48	780	1900/1118	228	3000	4.75	76	3.00
RB1D280/050B5	16-32	24	740	1930/1135	202	2400	8.4	73	2.60
RB1D280/050B6	34-57	48	740	1930/1135	202	2400	4.2	73	2.60



DC Centrifugal Fan, Backward Curved

Φ133-400 Specifications 技术参数


[illegible]



DC Centrifugal Fan, Backward Curved

Φ133-400 Specifications 技术参数

Outline & Wiring Diagram

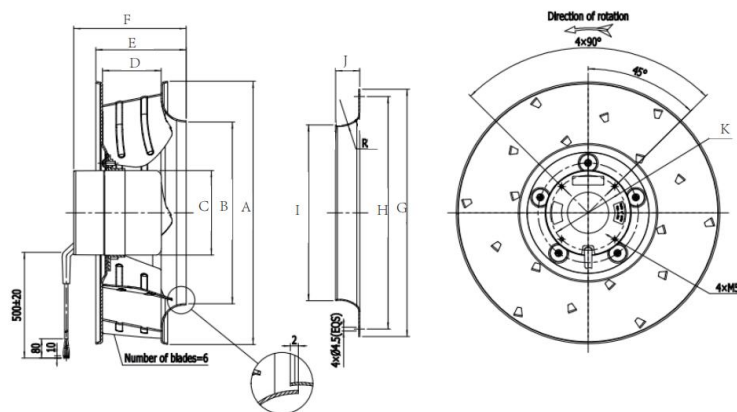

Cable Color 电缆颜色	Function 功能
Red 红色	+ UB
Yellow 黄色	0-10VDC / PWM
Blue 蓝色	GND
White 白色	Tach output 转速输出 3 pulse/rev


[illegible]




DC Centrifugal Fan, Backward Curved

Φ133-400 Specifications 技术参数


Curves

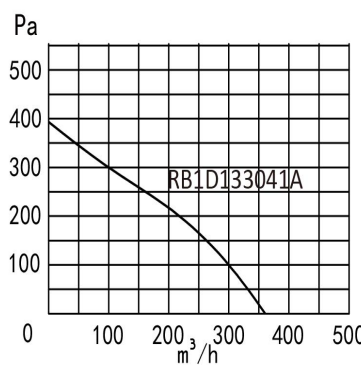


RB1D133/041A

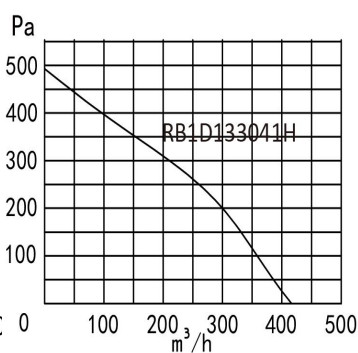


RB1D133/041H

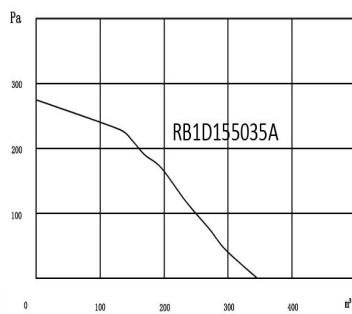


RB1D155/035A

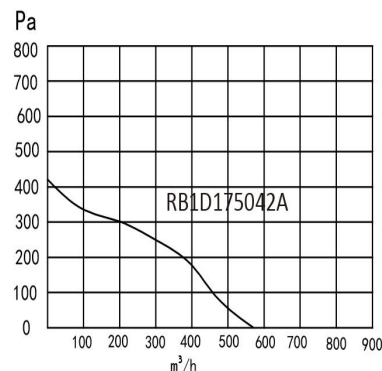


RB1D175/042A

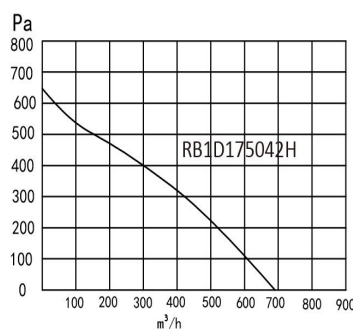


RB1D175/042H

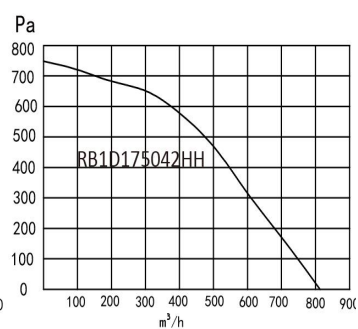


RB1D175/042HH

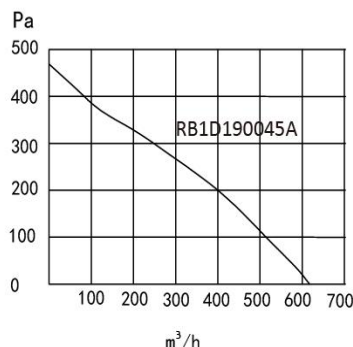


RB1D190/045A

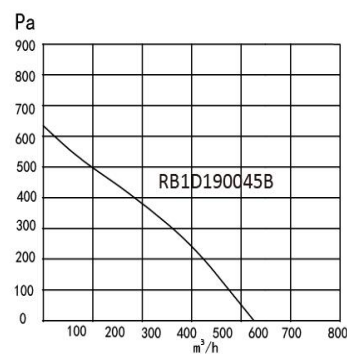


RB1D190/045B

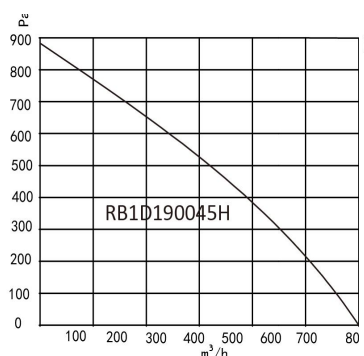


RB1D190/045H

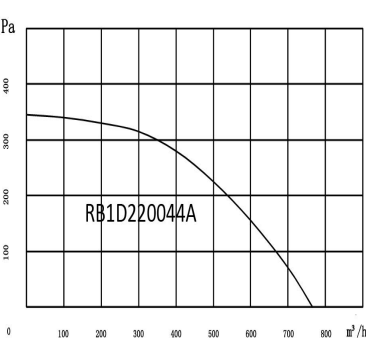


RB1D220/044A

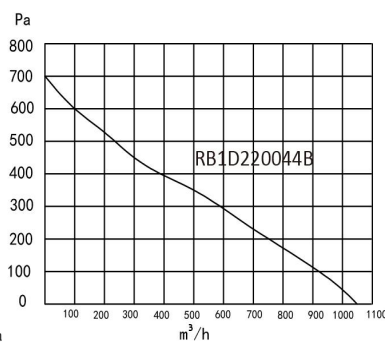


RB1D220/044B

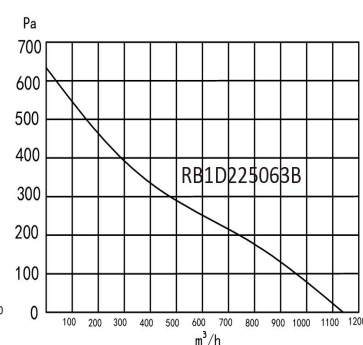


RB1D225/063B

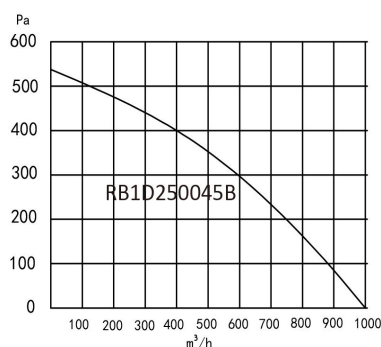


RB1D250/045B

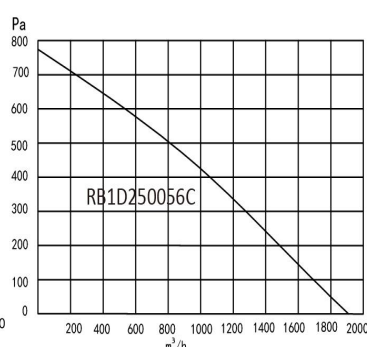

RB1D250/056C

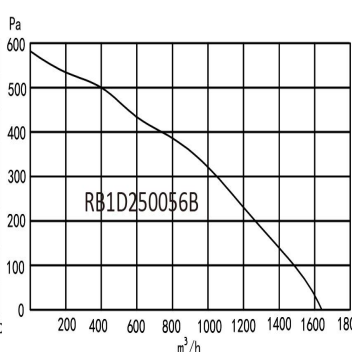

RB1D280/050B

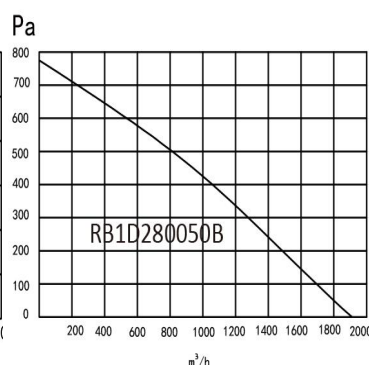


RB1D280/050B




DC Centrifugal Fan, Backward Curved

Φ133-400 Specifications 技术参数


Curves

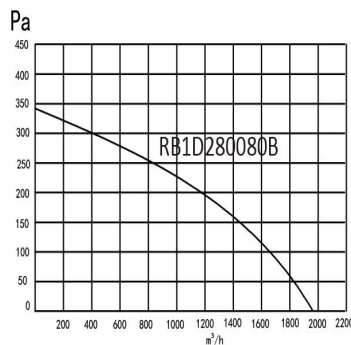


RB1D280/080B




RB1D280/080H

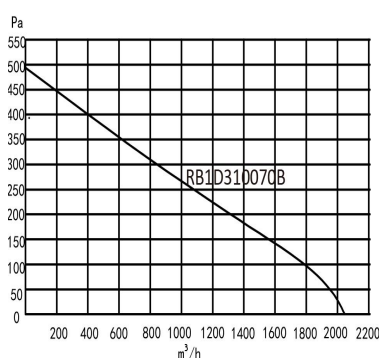


RB1D310/070B

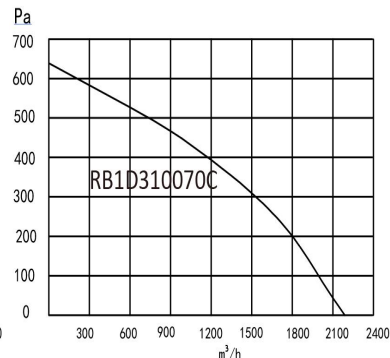


RB1D310/070C




RB1D310/101B

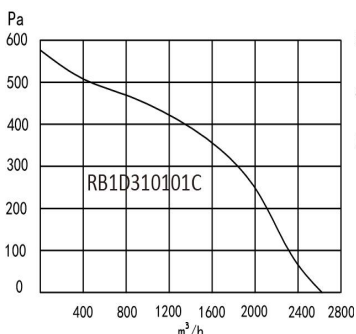


RB1D355/101C

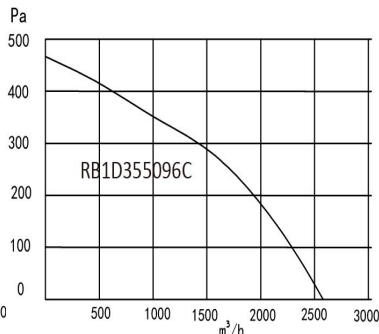


RB1D355/096C

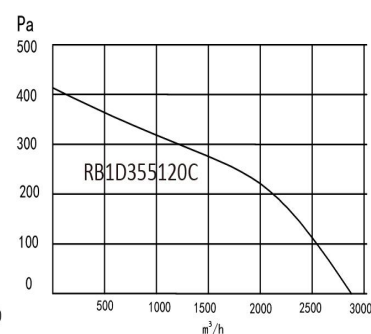


RB1D355/120C

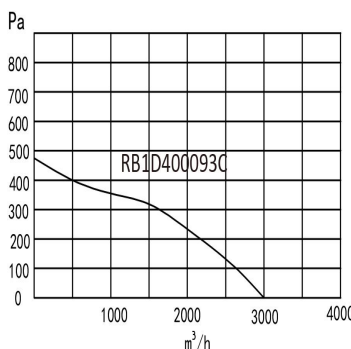

RB1D400/093C



RB1D400/93H

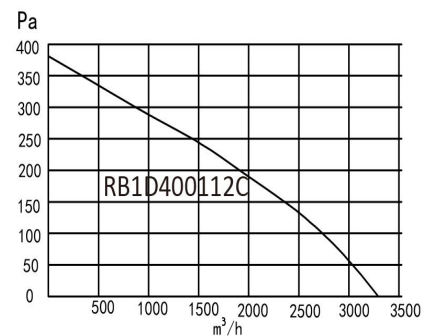

RB1D400/112C