



Φ108-280 Specifications 技术参数




- EC external rotor motor
- Galvanised Sheet Steel Impeller
- Galvanised Sheet Steel Housing
- Maintenance-free ball bearings
- Insulation "B/F", IP 44
- Operation Temperature: -20° C to 65° C
- Life time: over 30,000 hours
- CCC & CE listed; RoSH & ErP2015 compliant
- EMC: EN61000-6-3 / EN 61000-6-2 / EN61000-6-1
- Warrent: 12 months

[illegible]



Φ108-280 Specifications 技术参数

Wire Diagram

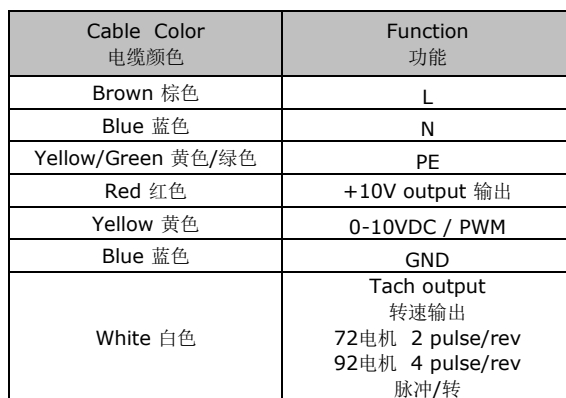


GP MOTOR TECHNOLOGY CO.,LTD 宁波吉谷电机技术有限公司; Tel: 0086-574-87704085; E-mail: motors@gpemotor.com; www.gpemotor.com




EC Centrifugal Blower, Single Inlet 单进风鼓风机

Φ108-280 Specifications 技术参数


Curves

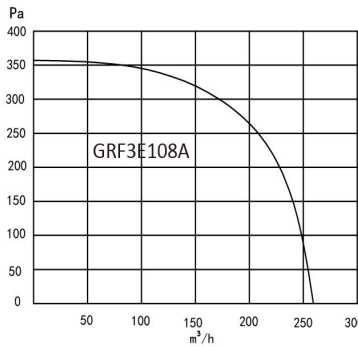


GRF3E108A2

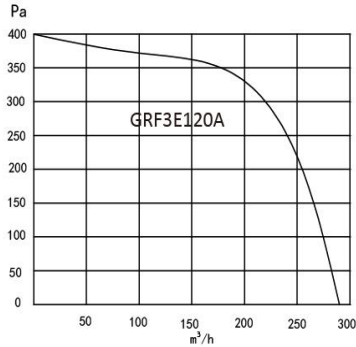


GRF3E120A




GRF3E133A

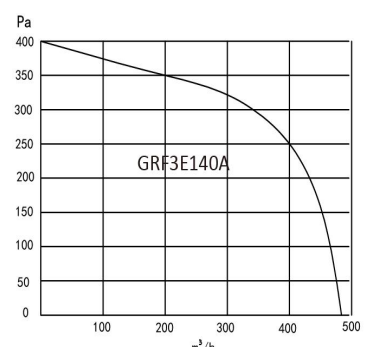


GRF3E140A

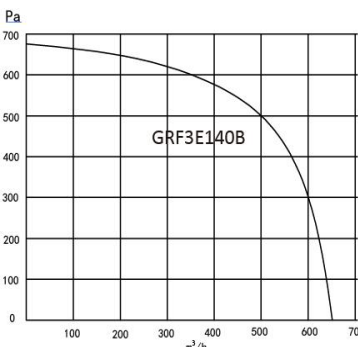


GRF3E140B

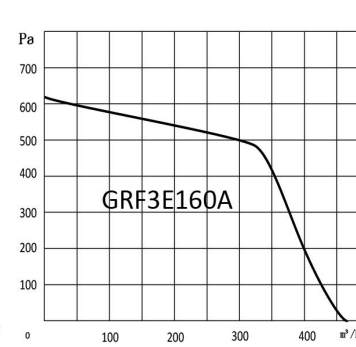


GRF3E160A

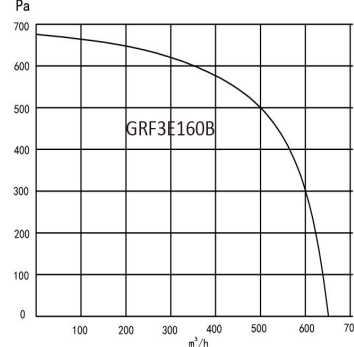


GRF3E160B

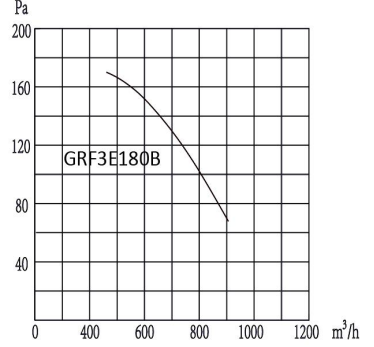


GRF3E180B




GRF3E200C

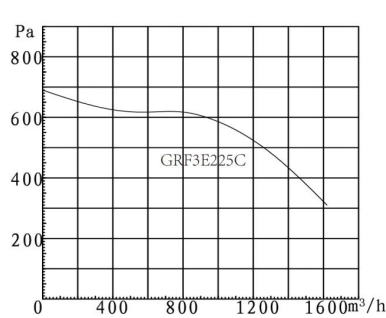

GRF3E225C

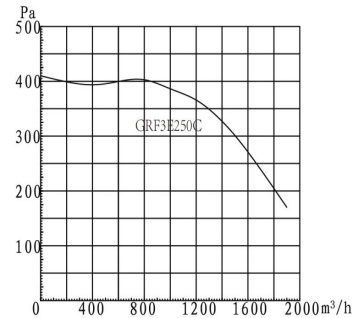

GRF3E250C



GRF3E280D